

A Better Way To Build Boundary.....



**Hindustan Infra**

— Mfg. of precast compound wall —

AN ISO 9001 : 2008 CERTIFIED CO.



☎ 63535 32022

🌐 [www.trirangainfra.com](http://www.trirangainfra.com)

☎ 82698 03455

✉ [gopal@trirangainfra.com](mailto:gopal@trirangainfra.com)



Plant Address : Village - Jheet,  
Raipur To Patan Road, Bhilai-3, Tal-Patan  
Dist - Durg - 491111 (Chhattisgarh).

## Introduction / Company Profile :

- We Hindustan Group Of Industries Introduce Ourselves As That Cares For Quality Products With The Culture Of Deep Dedication To Work, Determination To Succeed, Today Our Company Enjoys A Premium Position Among A Few
- We Are One of The Largest Manufacturer Of Prefabricated Rcc Precast Compound Walls With Different Designs As Well As Garden Curbing, Security Cabins, Labor Quarters Etc., As Per Customers' Requirements.
- Our Products Are Manufactured Under Stringent Norms And The Raw Materials Procured From Reputed Manufacturers And Suppliers Are Accepted Through Rigorous Quality Control Norms. All These Have Enabled Us To Maintain A Host Of Clients.
- We continue to give India Cost-effective, Durable, Maintenance-free, Aesthetic, User-friendly and eco-friendly Precast Concrete Solutions.




# Overview of Compound Wall :

- Basic Design of 8 Feet Height Precast/folding Compound Wall.

Our Wall can withstand load As Follows:


- Basic Wind Speed 150KMPH
- Wind Load 11.14 PSI
- Horizontal Load 12.8 PSI

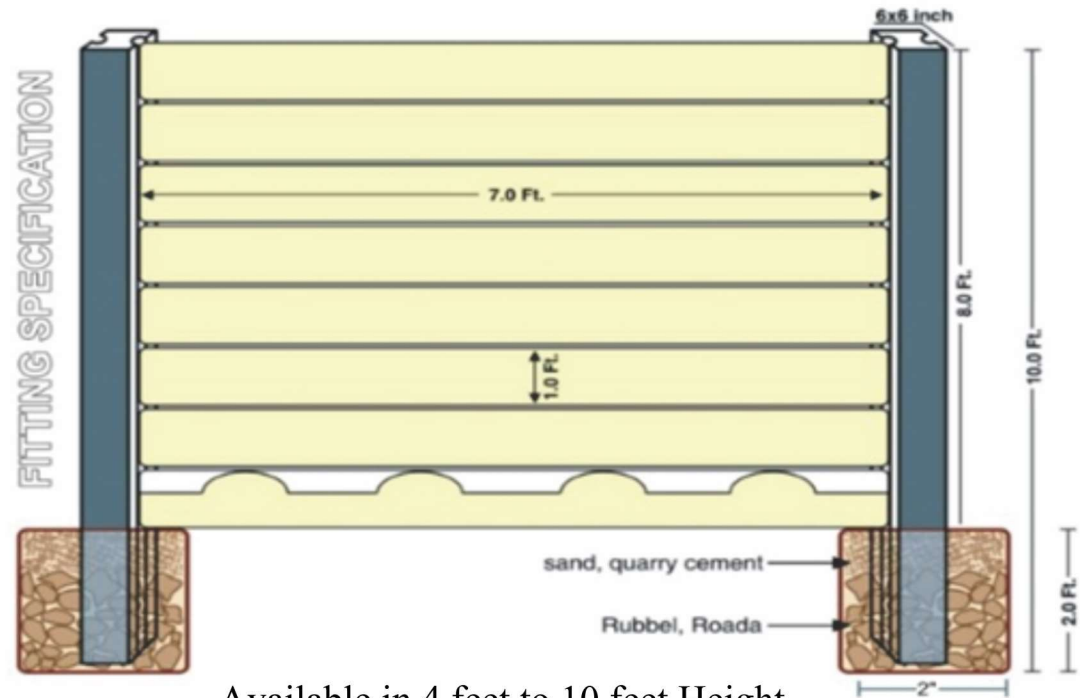

Available in 4 feet to 10 feet Height

## Prestressed Precast RCC Column Plan (Beam)

4 mm High Tensile Wire  
(7 NOS)



## Dimensions & Reinforcement:

150x150mm vertical 'I' section Column with 55mm girth.


Length is depend on customer's requirement.

It has two side girth, where we can easily filled the planks.

Post shall be reinforced with 7 roads High tensile steel twist wires of 4mm/3mm which is manufacturing with stressing system.

## Prestressed Precast RCC Panel Plan (Plank)

3mm High Strong (HTC Wire) M25 Grade  
(3 NOS)



- Rcc Post With 2100 Mm Length, 300mm Width And 50mm Thickness Planks Shall Be Use Of Different Heights.
- It Is Fixed In Column's 55mm Girth.
- Panel Shall Be Reinforced With 3 Roads High Tensile Steel 3mm/4mm Which Is Which Is Manufacturing With Stressing System And It Gives More Strength.

## OUR PRESENCE

- HYDERABAD
- INDORE
- BHOPAL
- KANPUR
- MUMBAI
- AHMEDABAD
- FARIDABAD
- AGRA
- HUBLI
- NAGPUR
- JAIPUR
- BIKANER
- NANDED
- BANGLORE
- ALWAR
- LUCKNOW
- VIJAYAWADA
- VELLORE
- RANCHI
- AMBALA
- BHUBANESWAR
- CHENNAI
- DHANBAD



MSME D & B D-U-NS ® NUMBER : 86-041-33990

TOLL FREE NO. 1800 890 3201

SCAN ME



एक कदम स्वच्छता की ओर

